

TRACK CONDITIONS

☐ Indoor ☐ Tight ☐ Smooth ☐ Hard Packed ☐ Blue Groove
☐ Wet ☐ Low Bite ☐ High Bite ☐ Outdoor ☐ Open ☐ Rough ☐ Loose/Loamy
☐ Dry ☐ Dusty ☐ Wed Bite ☐ Other

ENGINE

Gasket

mm

Plug

Muffler

Fuel

Clutch bell

☐ 16T

☐ 17T

☐ 18T

☐ Other T

Shoes

☐ 3

☐ 4

Spring

mm

DIFF

Front

Oil #

Center

Oil #

Rear

Oil #

T

x

T

Spur gear


T

T

x


T

FRONT SUSPENSION

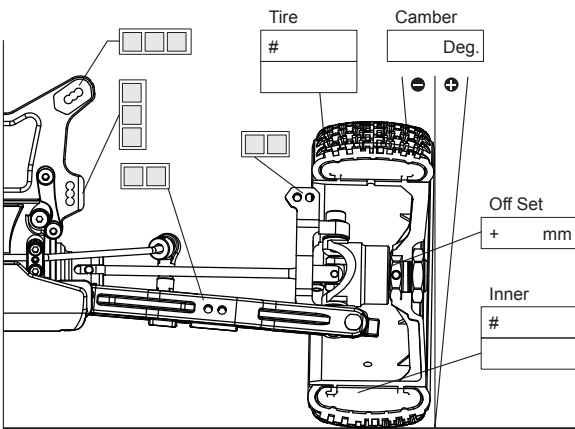

FRONT TOE ANGLE

CASTER ANGLE

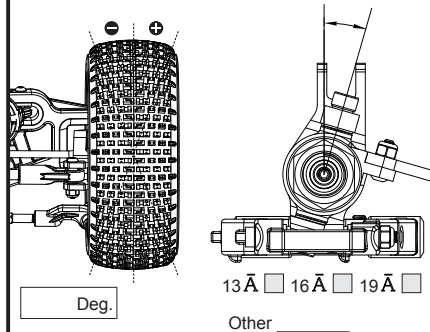

ANTI - ROLL BAR

FRONT

#8019 U Type 1.9mm ☐

#8021 U Type 2.1mm ☐


#8022 U Type 2.2mm ☐

#8023 U Type 2.3mm ☐

#8024 U Type 2.4mm ☐

#8025 U Type 2.5mm ☐

others ☐



KICK UP

TOE ANGLE




ANTI SQUAT


TOE ANGLE




REAR SUSPENSION

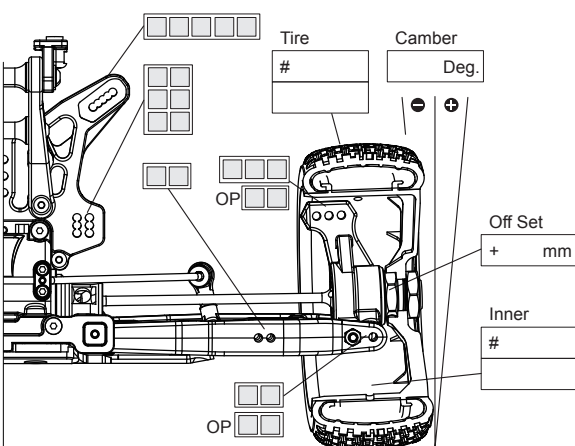

WHEEL BASE

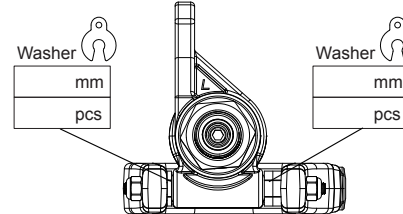

WING POSITION



ANTI - ROLL BAR

REAR

#8322 U Type 2.2mm ☐

#8323 U Type 2.3mm ☐

#8324 U Type 2.4mm ☐


#8325 U Type 2.5mm ☐

#8326 W Type 2.6mm ☐


#8328 W Type 2.8mm ☐

#8330 W Type 3.0mm ☐

others ☐




ACKERMAN

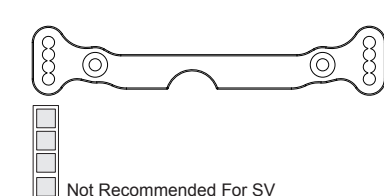


RIDE HEIGHT


WING

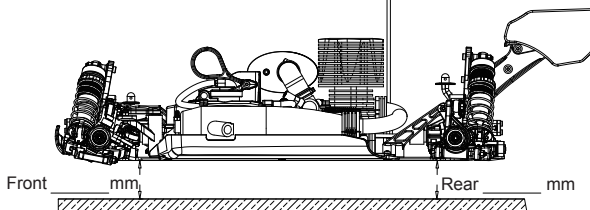

FRONT SHOCK

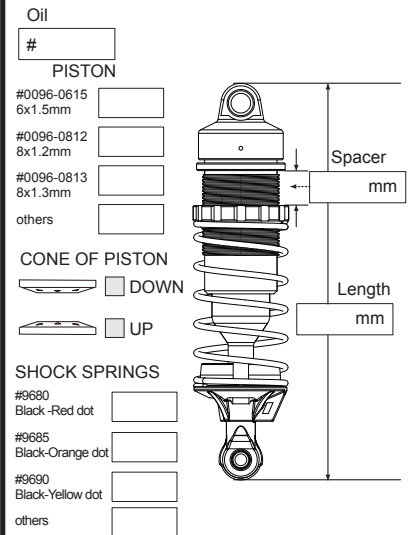

REAR SHOCK

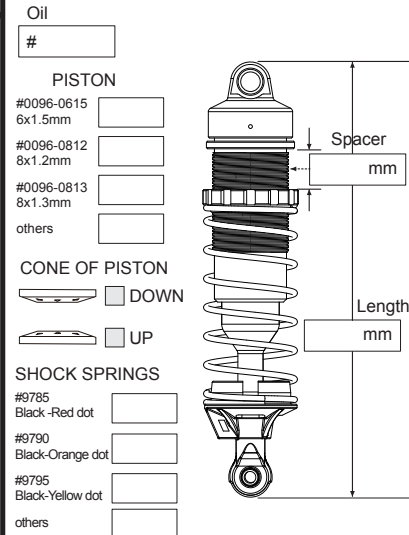

DROOP LIMITER

