

TRACK CONDITIONS

☐ Indoor ☐ Tight ☐ Smooth ☐ Hard Packed ☐ Blue Groove
☐ Wet ☐ Low Bite ☐ High Bite ☐ Outdoor ☐ Open ☐ Rough ☐ Loose/Loamy
☐ Dry ☐ Dusty ☐ Wed Bite ☐ Other _____

ENGINE

Gasket

mm

Plug

Muffler

Fuel

Clutch bell

☒ 13T

☐ 14T

☐ 15T

☐ Other _____ T

Shoes

☐ 3

☐ 4

Spring

mm

DIFF

Front

20

Oil #

Center

10

Oil #

Rear

5

Oil #

43

T

x

10

T

Spur gear

49

T

43


T

x

10



T

FRONT SUSPENSION

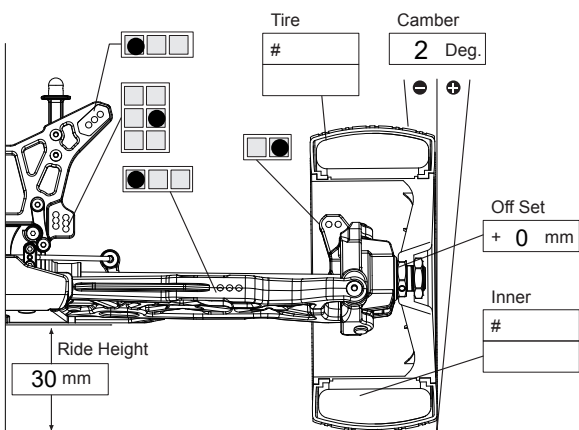

FRONT TOE ANGLE


CASTER ANGLE



ANTI - ROLL BAR

FRONT

#8019 U Type 1.9mm
 #8021 U Type 2.1mm
 #8022 U Type 2.2mm
 #8023 U Type 2.3mm
 #8024 U Type 2.4mm
 #8025 U Type 2.5mm
 others



KICK UP

FF




FR



ANTI SQUAT

TOE ANGLE


RF




RR




REAR SUSPENSION

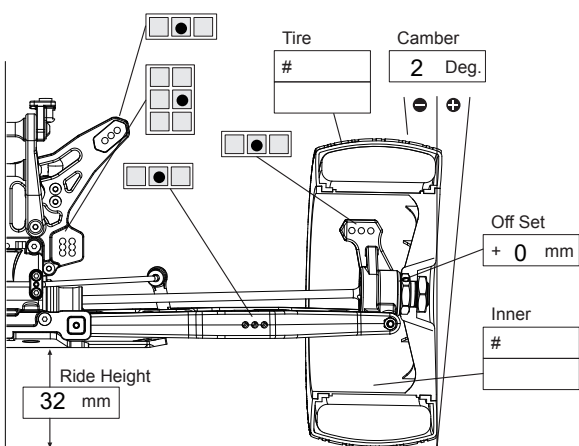

WHEEL BASE

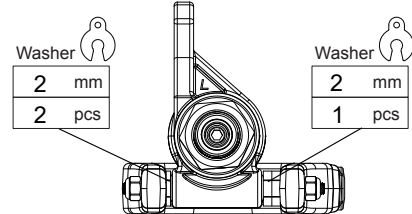

WING POSITION




ANTI - ROLL BAR

REAR

#8322 U Type 2.2mm
 #8323 U Type 2.3mm
 #8324 U Type 2.4mm
 #8325 U Type 2.5mm
 #8326 W Type 2.6mm
 #8328 W Type 2.8mm
 #8330 W Type 3.0mm
 others




ACKERMAN

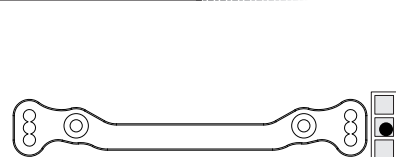

RIDE HEIGHT

WING

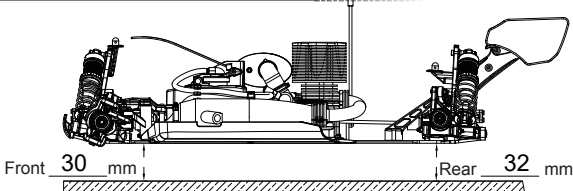

FRONT SHOCK

Oil

45

PISTON

#0096-0615

6x1.5mm

#0096-0812

8x1.2mm

#0096-0813

8x1.3mm


others

CONE OF PISTON

☒ DOWN

☐ UP

SHOCK SPRINGS

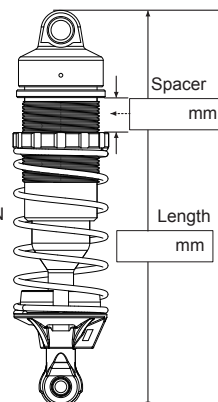

REAR SHOCK

Oil

40

PISTON

#0096-0615

6x1.5mm

#0096-0812

8x1.2mm

#0096-0813

8x1.3mm


others

CONE OF PISTON

☒ DOWN

☐ UP

SHOCK SPRINGS

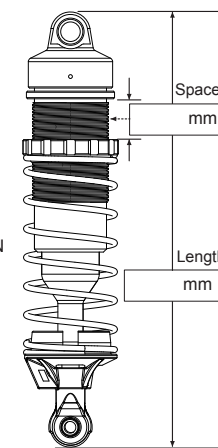

REBOUND

