FACTORY SETUP SHEET

# A215

DATE

DRIVER

TRACK STANDARD 1

**TRACK CONDITIONS** ○ Indoor ○ Tight ○ Smooth ○ Hard Packed ○ Blue Groove

○ Wet ○ Low Bite ○ High Bite ○ Outdoor ○ Open ○ Rough ○ Loose/Loamy

○ Dry ○ Dusty ○ Wed Bite ○ Other

**ENGINE** BULLITT B-219 | **Gasket** STD mm | **Plug** BULLITT P3 | **Muffler** BETA | **Fuel** PIRANHA

**Clutch bell** ○ 16T ● 17T ○ 18T ○ Other ___ T | **Shoes** ● 3 ○ 4 | **Spring** mm

**DIFF**

| Front | Center | Rear |
|---|---|---|
| 20K Oil # | 3K Oil # | 5K Oil # |
| 43 T × 10 T | Spur gear 45 T | 43 T × 10 T |

## FRONT SUSPENSION

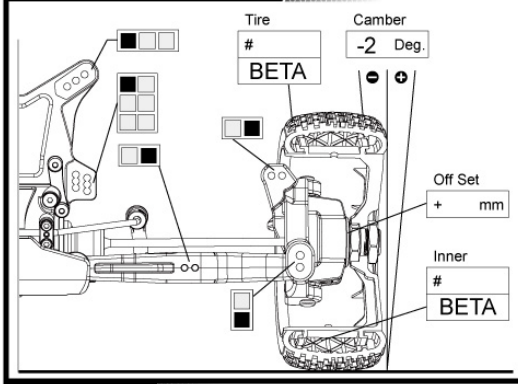


## FRONT TOE ANGLE / CASTER ANGLE

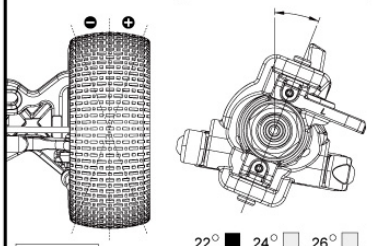


## FRONT SHOCK

Oil # 45

PISTON

- #0096-0615 6x1.5mm
- #0096-0812 8x1.2mm
- #0096-0813 8x1.3mm ■
- others

CONE OF PISTON ■ DOWN □ UP

SHOCK SPRINGS

- #9680 Black-Red dot ■
- #9685 Black-Orange dot
- #9690 Black-Yellow dot
- others

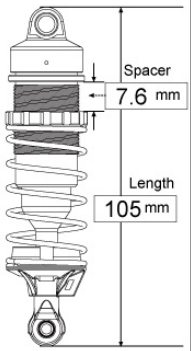


## KICK UP

## ANTI ROLL BAR FRONT

- #8019 U Type 1.9mm
- #8021 U Type 2.1mm
- #8022 U Type 2.2mm
- #8023 U Type 2.3mm
- #8024 U Type 2.4mm ■
- #8025 U Type 2.5mm
- others

## ANTI SQUAT / TOE ANGLE

## WHEEL BASE

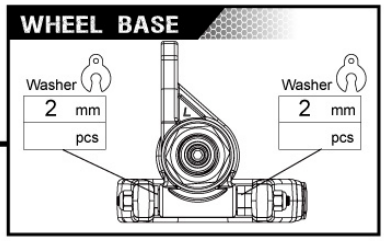


## REAR SHOOCK

Oil # 35

PISTON

- #0096-0615 6x1.5mm
- #0096-0812 8x1.2mm
- #0096-0813 8x1.3mm ■
- others

CONE OF PISTON ■ DOWN □ UP

SHOCK SPRINGS

- #9785 Black-Red dot
- #9790 Black-Orange dot ■
- #9795 Black-Yellow dot
- others

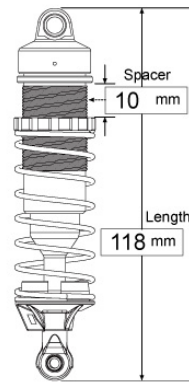


## REAR SUSPENSION

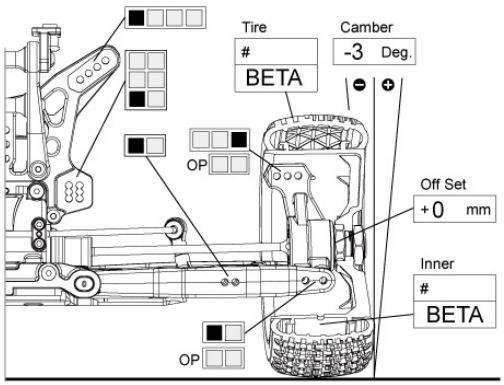


## WING POSITION



## ANTI ROLL BAR REAR

- #8322 U Type 2.2mm
- #8323 U Type 2.3mm
- #8324 U Type 2.4mm ■
- #8325 U Type 2.5mm
- #8326 W Type 2.6mm
- #8328 W Type 2.8mm
- #8330 W Type 3.0mm
- others




## DROOP LIMITER




## ACKERMAN



## RIDE HEIGHT
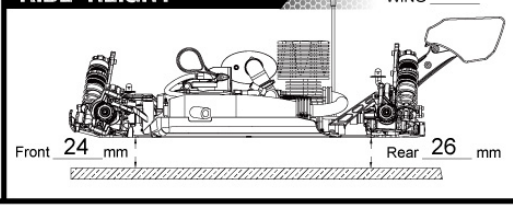
WING ___