

TRACK CONDITIONS

☐ Indoor ☐ Tight ☐ Smooth ☐ Hard Packed ☐ Blue Groove

☐ Wet ☐ Low Bite ☐ High Bite ☐ Outdoor ☐ Open ☐ Rough ☐ Loose/Loamy

☐ Dry ☐ Dusty ☐ Wed Bite ☐ Other

ENGINE

Gasket

mm

Plug

Muffler

Fuel

Clutch bell ☐ 16T ☒ 17T ☐ 18T ☐ Other T

Shoes ☒ 3 ☐ 4 Spring mm

DIFF Front 5000 Oil #

Center 5000 Oil #


Rear 3000 Oil #

43 T x 10 T

Spur gear 45 T


40 T x 9 T

FRONT SUSPENSION

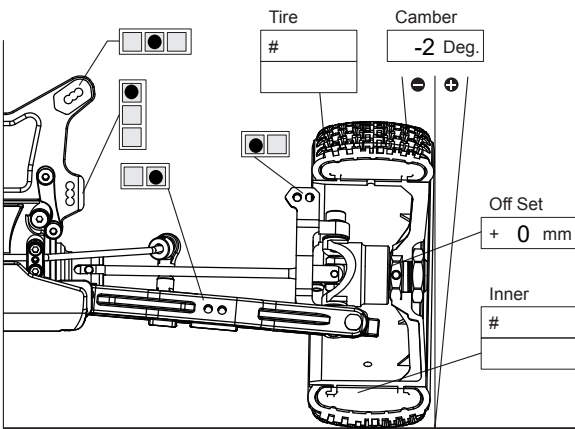

FRONT TOE ANGLE


CASTER ANGLE

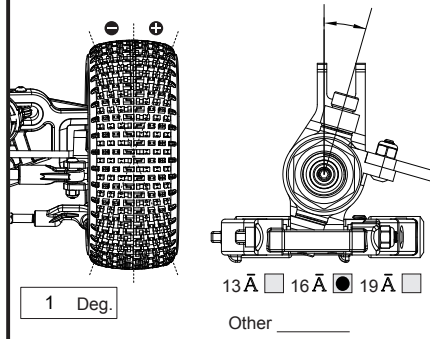

ANTI - ROLL BAR

FRONT

#8019 U Type 1.9mm
#8021 U Type 2.1mm
#8022 U Type 2.2mm
#8023 U Type 2.3mm
#8024 U Type 2.4mm
#8025 U Type 2.5mm
others



KICK UP

TOE ANGLE




ANTI SQUAT


TOE ANGLE




REAR SUSPENSION

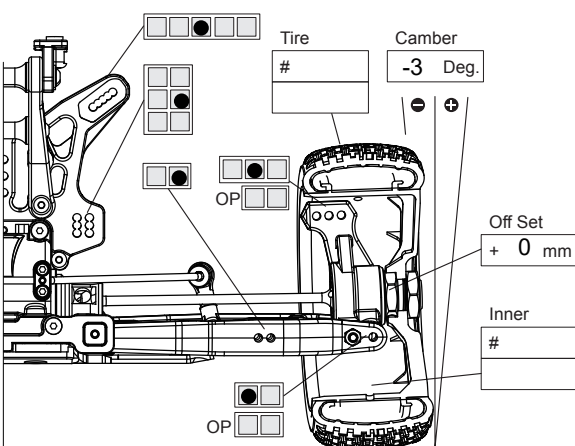

WHEEL BASE

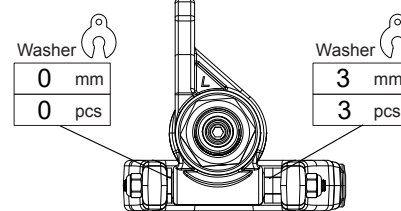


WING POSITION




ANTI - ROLL BAR

REAR

#8322 U Type 2.2mm
#8323 U Type 2.3mm
#8324 U Type 2.4mm
#8325 U Type 2.5mm
#8326 W Type 2.6mm
#8328 W Type 2.8mm
#8330 W Type 3.0mm
others




ACKERMAN

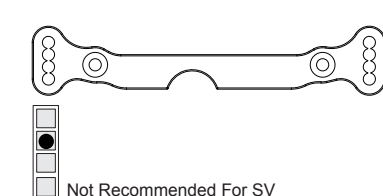


RIDE HEIGHT


WING

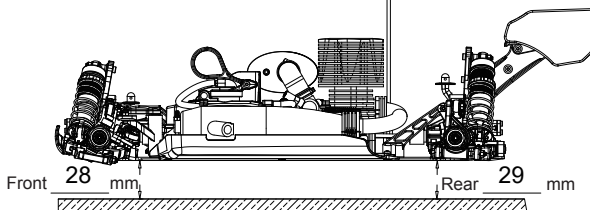

FRONT SHOCK

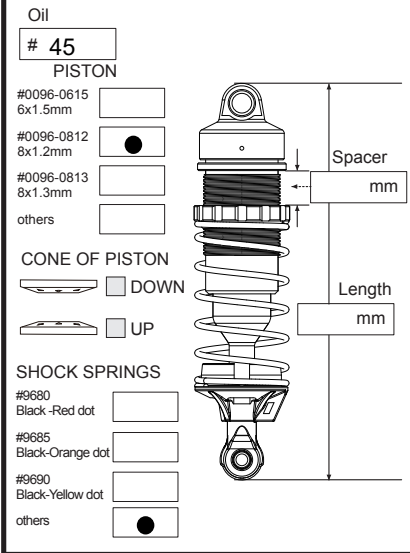

REAR SHOCK

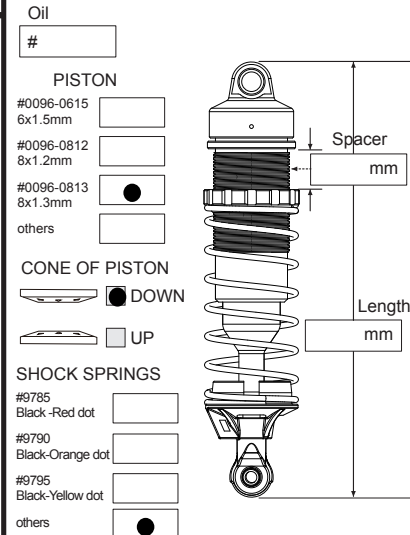

DROOP LIMITER

